


FX-000C10



SMD

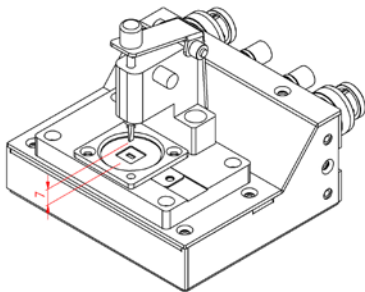

Bottom Electrode SMD Test Fixture

Frequency	DC to 30MHz
Max. Voltage	±42Vpeak max.(AC+DC)
Terminal Connector	4-Terminal Pair, BNC
DUT Connection	2-Terminal
DUT Size	≤9x9x5mm (W/H/D)
Dimensions (approx.)	91x80x98mm (W/H/D)
Weight (approx.)	237g
Operating Temperature	0° C to 55° C
Applicable Models	6363~6367 · 6632 · 6630

Freq.

1MHz

5MHz

10MHz

20MHz

30MHz

50MHz

Applicable Models



6363 / 6364 / 6365 / 6366 /
6367 / 6365A / 6365B



6630



6632