



F663001 A/B/C

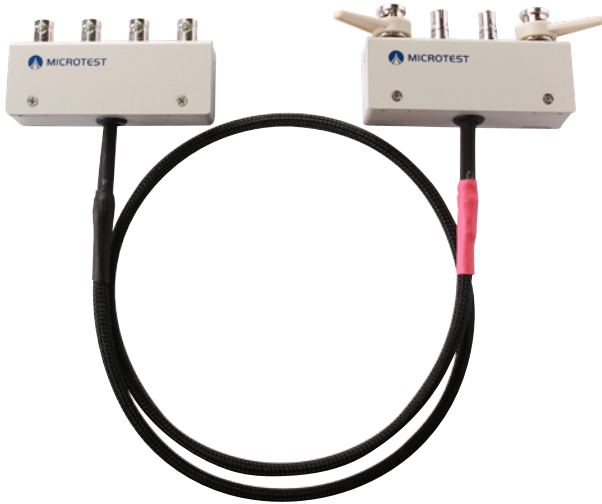

A/B/C BNC Test Leads	
Frequency	DC to 20MHz/10MHz/5MHz (A/B/C)
Max. Voltage	±200V peak max.(AC+DC)
Terminal Connector	4-Terminal Pair, BNC
DUT Connection	4-Terminal
Cable Length(approx.)	0.5m/1m/2m (A/B/C, RG174)
Weight (approx.)	197g/224g/276g
Operating Temperature	0° C to 55° C
Applicable Models	6363~6367、6632、6630

Application



Freq.	1MHz	2m	1m	0.5m	30MHz	50MHz
		5MHz	10MHz	20MHz		
		C	B	A		

Applicable Models



6363 / 6364 / 6365 / 6366 / 6367 / 6365A / 6365B



6630



6632