

DC Bias Current Test System

6210/6220/6240 + 6632

6223/6243 + 6632

Features

- Current and frequency graphic scanning analysis
- Temperature-rising scan function can solve the problems of overheating a DUT to burn
- DCR Measurement function
- Long-term consecutive maximum power output
- Interchangeable bi-direction current function
- Frequency response 100Hz-10MHz (With DC Bias Current 6223/6243)
- DC Bias Current Max.320A (6243)
- Direct Handler interfaces control through LCR power meter



CE RS-232 Handler

Accessories / Fixtures

- | | |
|---|--|
| <p>Standard</p> <ul style="list-style-type: none"> - Power Cord - Ethernet cable - Black/Red thermoplastic sleeve (6210) - F6210(DIP) | <p>Optional</p> <ul style="list-style-type: none"> - PC Link software - F6220 (SMD) - 6210/6220/6240 connect plate (short/long) - BNC+BNC cable - F6220/F6240 (SMD) |
|---|--|

Applications

Components: High current power inductor, common mode choke, mini molding choke, high power components of EV charging connector
 Electric Vehicles: Electric supercharger system

Specifications


DC Bias Model Name	6210	6223/6220	6243/6240	
Output Current	10A	20A	40A	
Accuracy	0.000A-1.000A 1%+5mA			
	1.001A-5.000A 2%			
	5.001A-20.000A 3%			
Power Consumption	6223/6220/6210 (320W Max.) 6243/6240 (640W Max.)			
LCR Meter / Impedance Analyzer	6632			
Frequency (Hz)	10Hz-1/3/5/10/20/30M/50MHz			
AC Drive Level	10mV-2Vrms			
DC Drive Level	1V (Fixed)			
Output Impedance	25Ω, 100Ω (switchable)			
Measurement Parameters and Ranges	R, X	±0.000mΩ-9999.99MΩ		
	Y	0.00000μS-999.999kS		
	G, B	±0.00000μS-999.999kS		
	θRAD	±0.00000-3.14159		
	θDEG	±0.000°-180.000°		
	Cs, Cp	±0.00000pF-9999.99F		
	Ls, Lp	±0.00nH-9999.99kH		
	D	0.00000-9999.99		
	Q	0.00-9999.99		
	Δ	±0.00%-9999.99%		
	Rdc	0.00mΩ-99.9999MΩ		
	εr' εr"	0-100000		
	μr' μr"	0-100000		
	Output Current (Max.)/ Frequency Response	60A Max./3MHz (6210+6632) 120A Max./3MHz (6220+6632) 120A Max./10MHz (6223+6632) 320A Max./3MHz (6240+6632) 320A Max./10MHz (6243+6632)		
	Constant Power Output	●		
Current Switch	●			
DC Resistance	●			
Current Graphic Scanning Analysis	●			
Frequency Graphic Scanning Analysis	●			
Temperature Rise	●			

General

Power Supply	Voltage 88-264Vac Frequency 47-63Hz
Interface	RS-232, Handler
Trigger Test	Auto, Manual, RS-232, GPIB, Handler
Environment	Temperature: 10-40°C, Humidity: 20-90%RH
Dimension (W*H*D)	337×145×525mm (6223/6220/6210) 435×145×525mm (6240) 435×145×644mm (6243)
Weight	15Kg (6223/6220/6210) 20Kg (6243/6240)

Key Features

A Accurately Test Magnetics Carrying DC Bias Current

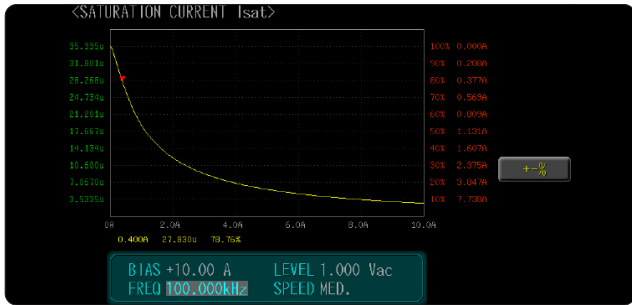


I_{sat} (Magnetic saturation current curve)




The value of the inductance is 2.06983uH.

Using a DC Bias current source to apply a 10A bias current to the inductor, the inductance decreased from 2.06983uH to 1.02845uH.

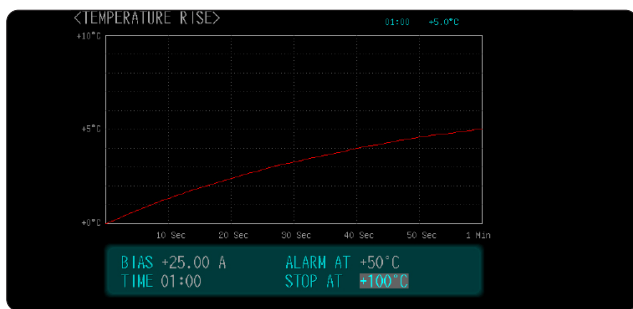

I_{rms} (Rated current curve)



Magnetic saturation current is called I_{sat} , and the temperature rise current is called I_{rms} . When the transformer and the inductor pass a large current in the actual circuit operation, the magnetic field of the magnetic core will produce magnetic saturation, which will cause the inductance characteristic to decline. Therefore, the R&D engineer will set the current value of the inductance reduction allowable range.

B DC Bias Fixtures



Standard fixture F6210 for measuring inductance, optional fixture F6220 for measuring SMD inductance.

C Rack-mounted System



Reserve space for expanding current, support computer connection software, and save measurement data.