


Safety Tester

2

Impulse/Surge Tester 7703/7713

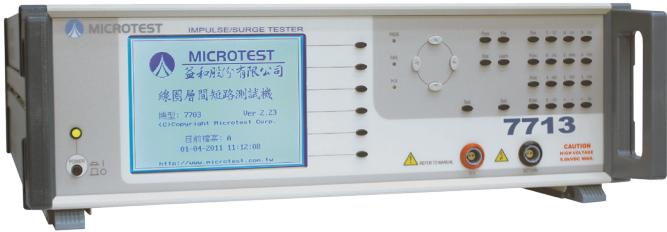

Key Feature

- High-frequency harmonics analysis

Low power non-destructive test

Automatic Level Control Function

Waveform comparison

Lowest inductance to 0.5μH
- Measure voltage up to 10,000V (7713)

Provide statistic and print functions

High-frequency noise signal analysis

Auto voltage Learn function

Accessory

- Standard

Power cord

User manual CD

HV Test Cable
- Optional

PC Link Software

RS-232 Cable

Remote Cable

D-Sub Footswitch

Measuring Item

HARM Analysis	Waveform comparison
HFLT Analysis	Corona
Total Area	Flutter
Area comparison	

Specification

7703	2 Channels
7713	2 Channels
7703 Impulse Voltage	200V ~ 5000V (programmable)
7713 Impulse Voltage	200V ~ 10000V (programmable)
Lowest Inductance Value	0.5μH
Impulse Voltage Accuracy	±2%
Measuring Time	50mS
Measuring Mode	The comparison between standard and test waveforms
Indicator	Pass / Fail / HV output LED red-green indicator lights / Screen Display / Sound

General

Power Supply	98 ~ 132Vac or 192 ~ 264Vac
Display	320*240 dot-matrix display
Interface	RS-232 、Print port 、Remote Control
Flash Memory	200 sets
Operation	Auto 、Manual
Environment	Temperature : 10 ~ 40℃ 、Humidity : 20 ~ 90%RH
Dimension (W*H*D)	435x145x522 mm
Weight	8 Kg